



# Form-on smartPANELplus

- ✓ grey edge sealing prevents colour transfer from edge onto concrete
- 🔄 long life span, TOP surface
- 👁️ brown surface for clear distinction


**FORM-ON**<sup>®</sup>

# Form-on smartPANELplus

long life span  
by using of  
main boards

## Your advantages:

- grey edge sealing prevents colour transfer from edge onto concrete
- use of main boards limits cracking to a minimum
- reduced absorption of moisture
- reliable quality due to production according to EN 13353 and EN 13017-1 or Ö-Norm B 3023
- clear identification through brown top coat prevents premature cutting on site
- opportunity for brand advertising thus providing additional theft protection through imprint of your company name

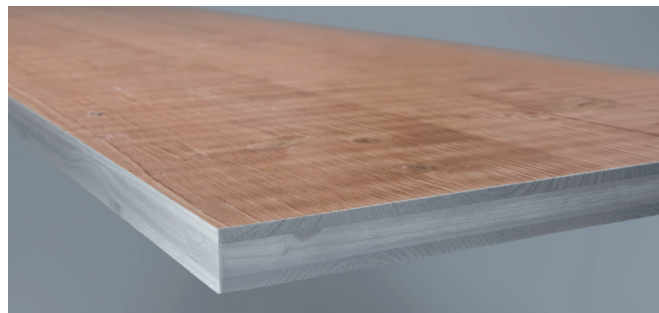

## Dimensional tolerances

(new sheet with 12% wood moisture)

	Nominal dimension	
	21 mm	27 mm
Thickness	20.9 ± 1.0 mm	26.4 ± 1.0 mm
Length	± 1.0 mm	
Width	± 1.0 mm	

Form-on smartPANELplus	PU*	kg	Art. no.
Form-on smartPANELplus 21 150x50	100	7.3	620303000
Form-on smartPANELplus 21 200x50	100	9.7	620304000
Form-on smartPANELplus 21 250x50	100	12.1	620305000
Form-on smartPANELplus 21 300x50	100	14.6	620306000
Form-on smartPANELplus 27 150x50	80	9.4	620403000
Form-on smartPANELplus 27 200x50	80	12.1	620404000
Form-on smartPANELplus 27 250x50	80	15.1	620405000
Form-on smartPANELplus 27 300x50	80	18.2	620406000

\*PU = packaging unit

