

Concrete
Construction

Form-on Plywood sheets

- 🔄 wide range of products for concrete construction
- ✓ designed to meet your needs
- ⬇ ideal solution from infill zones to fair-faced concrete


Form-on®

Form-on Plywood sheets.

The ideal solution from infill zones to fair-faced concrete.


For high quality concrete surfaces

- high usability and durability
- recommend for wall- and floor formwork, replacement sheets for framed formwork
- great results in architectural concrete

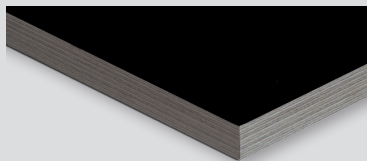

DokaPly Birch

- Birch plywood sheet double-sided coated for horizontal and vertical formwork applications, for concrete surfaces with the highest requirements.
- Thicknesses: 9 mm; 15 / 18 / 21 mm
- Formats: 1.50 x 0.75 m | 1.80 x 1.80 m; 0.625 x 2.50 m | 1.25 x 2.50 m | 1.50 x 3.00 m | 1.20 x 2.70 m | 1.20 x 3.30 m

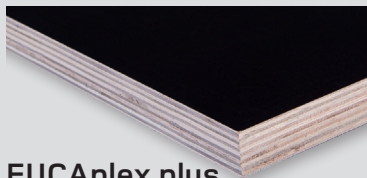


EUCApex plus

- Solid, Asian, eucalyptus plywood sheet, double-sided coated with 240 g/m² film resin, for horizontal and vertical formwork applications for concrete surfaces with higher requirements without "rippling".
- Thickness: 21 mm
- Format: 1.25 x 2.50 m


For regular concrete surfaces

- infill zones
- average frequency of use
- light sheets for easy handling
- optimal for floor formwork

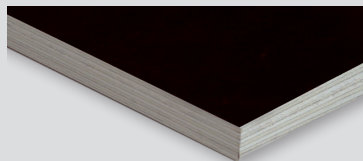

DokaPly eco

- Solid and light plywood sheet of European, poplar plywood, double-sided coated with 120 g/m² brown phenolic resin film, for horizontal and vertical formwork applications for concrete surfaces of higher requirements.
- Thicknesses: 18 / 21 mm
- Formats: 1.22 x 2.44 m | 2.50 x 1.25 m

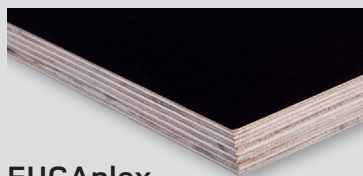

EUCApex

- Asian, eucalyptus veneered plywood sheets double-sided coated with 130 g/m² film resin, for horizontal and vertical formwork applications without "rippling".
- Thickness: 21 mm
- Format: 1.25 x 2.50 m



UNIpex

- Asian, poplar plywood double-sided coated with 160 g/m² black melamin resin for loose floor formwork sheets for concrete surfaces without demand.
- Thickness: 21 mm
- Format: 1.25 x 2.50 m


For secondary concrete surfaces

- stay-in-place formwork & infill sheets
- single use
- site equipment, site- and screen fencing & dust partitions



DokaPly natural

- Elliotis pine, uncoated plywood sheet for secondary purposes and infill.
- Thickness: 20 mm
- Format: 2.50 x 1.25 m

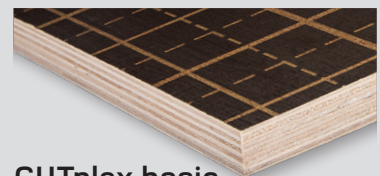

CUTplex basic

- Asian, poplar plywood double-sided coated with 160 g/m² black melamine resin for secondary applications and infill.
- Thickness: 20 mm
- Format: 1.5 x 2.50 m

- other formats and thicknesses on request

Wooden formwork sheets are a natural product. Moisture absorption and release, caused for example by changes in weather and contact with wet concrete, can result in swelling and shrinkage. Please appreciate that we cannot accept liability for climate- or weather-related changes in shape or surface condition. All information on properties and appearance of the concrete surfaces and regarding possible number of use cycles of the formwork sheets are non-binding guide values. They are quoted here for information purposes only, within of formwork-related possibilities, the material-specific values for swelling and shrinkage, the wood-type and sheet specific properties and the conditions of use and treatment by the user.



The mark of responsible forestry

All products also available FSC-certified on request.

Form-on®

Form-on GmbH

Josef Umdasch Platz 1
3300 Amstetten
Austria

T: +43 7472 23153
office@form-on.com
www.form-on.com

