


Form-on smartPROPplus 30

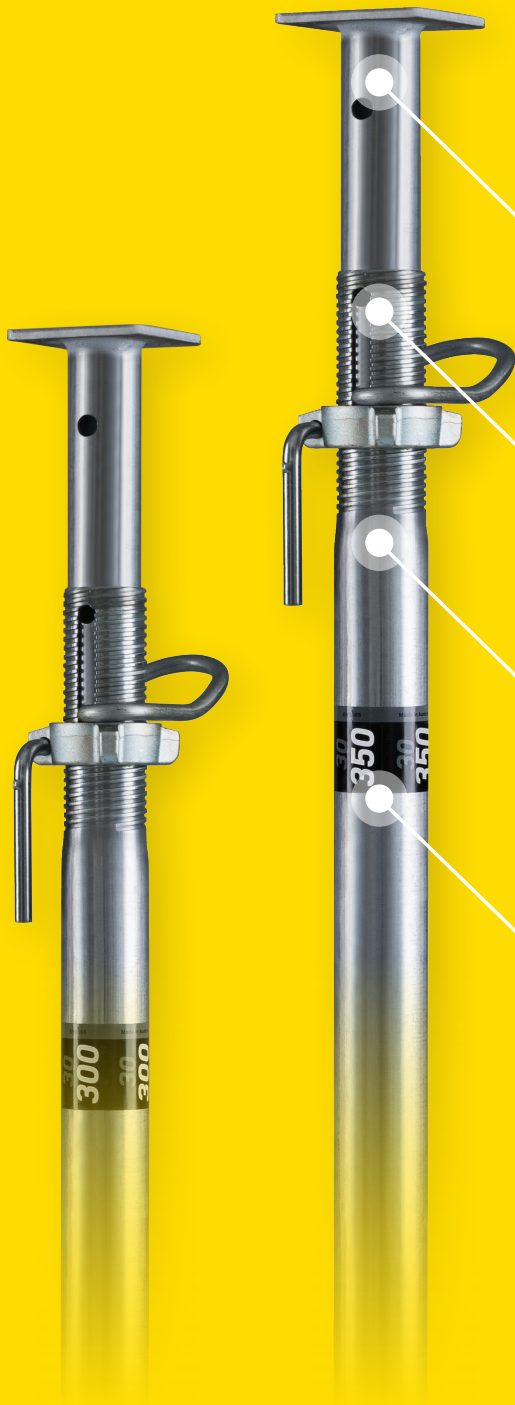

With hole numbering
for efficient working

Safe through anti-drop-out
latch and crush guard

Long service life thanks
to galvanisation

Consistently high load
capacity of 8.5 kip at
any extension length








Scan the QR code
to learn more.

Form-on USA

Form-on smartPROPplus 30

Your advantages:

-  High safety due to high load capacity according to EN1065 class C/E.
-  Reliability in many applications due to forged nut and 8 mm (approx. 5/16") head and foot plate.
-  Safe working thanks to anti-drop-out latch and crush guard.
-  Prop retains its value for many years thanks to high-quality manufacturing and galvanisation.
-  Quick and safe release of the clamped floor prop through optimised thread pitch.

Form-on smartPROPplus 30

| Variant | Length cm/ft. | P.U. | kg/lbs | Art. no. |
|---------|--------------------|------|-----------|-----------|
| 30 300 | 173-300/5'8"-9'10" | 42 | 16.3/35.9 | 620051000 |
| 30 350 | 198-350/6'6"-11'5" | 35 | 20.3/44.6 | 620052000 |

Quick and easy height adjustment thanks to numbered and engraved pegging holes.




TECHNICAL DATA

Certificate: Z-8.311-946

Load capacity: min. 30kN/6614lbs. for any extension length up to 41.2kN/9262lbs. depending on extension length

Standard: EN1065 class C/E

With your individual branding!

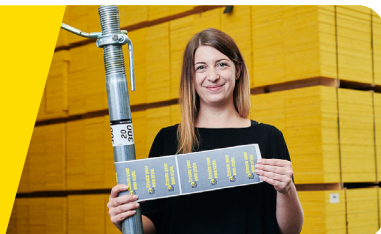

| Prop length m/ft. | C/E 300 | | C/E 350 | |
|-------------------|----------------|-------------|----------------|-------------|
| | bottom kg/lbs. | top kg/lbs. | bottom kg/lbs. | top kg/lbs. |
| 3.5/11'5" | | | 30.9/6812 | 34.2/7688 |
| 3.4/11'1" | | | 33.3/7486 | 36.8/8272 |
| 3.3/10'9" | | | 35.8/8048 | 39.3/8834 |
| 3.2/10'5" | | | 38.2/8587 | |
| 3.1/10'2" | | | | |
| 3.0/9'11" | 30.9/6946 | 34.8/7823 | | |
| 2.9/9'6" | 33.6/7553 | 37.3/8385 | | |
| 2.8/9'2" | 36.2/8138 | 39.7/8924 | | |
| 2.7/8'11" | 38.6/8677 | | | |
| 2.6/8'6" | 40.0/8992 | | | |
| 2.5/8'2" | | | | |
| 2.4/7'10" | | | | |
| 2.3/7'6" | | | | |
| 2.2/7'2" | | | | |
| 2.1/6'10" | 41.2/9262 | 41.2/9262 | | |
| 2.0/6'6" | | | | |
| 1.9/6'2" | | | | |
| 1.8/5'10" | | | | |
| 1.7/5'6" | | | | |

Subject to change in the course of technical development.

POSITION
OUTER TUBE

bottom



top



TIP: Increased load capacity by flipping the prop used upside down.

Permissible load capacity (kN/lbs.) depending on extension length and outer tube position (as per general building inspectorate approval Z-8.311-946)

We supply formwork.
Easy. Fast. Transparent.

Form-on USA Corp.

929 Alton Rd, Ste. 500

Miami Beach, FL 33139

United States of America

T: +1 786 562-9950

usa@form-on.com

form-on.com

