

Form-on smart**PANEL**plus



Easy cleaning of the edge
thanks to wax coating

Brown surface for clear
differentiation

Reduced moisture absorption
& no discolouration due to
grey edge sealing

High resistance & service life



Scan the QR code
to learn more.

form-on


Form-on smart**PANEL**plus

Your advantages:


-  No staining of the edge on concrete thanks to grey edge sealing.
-  Minimal cracking due to the use of main material.
-  Possibility of self-advertising & theft protection through imprint of your company name.
-  Reliable quality due to manufacture in accordance with EN13353 & EN13017-1 and ÖNORM 3023.
-  Clear identification thanks to the brown surface colour prevents premature cutting on the construction site.
-  Reduced moisture absorption.

Dimensions	P.U.	kg/lbs.	SKU
21mm 150x50 cm	100	7.3/16.1	620303000
21mm 200x50 cm	100	9.7/21.4	620304000
21mm 250x50 cm	100	12.1/26.7	620305000
21mm 300x50 cm	100	14.6/32.2	620306000

Dimensions	P.U.	kg/lbs.	SKU
27mm 150x50 cm	80	9.1/20.1	620403000
27mm 200x50 cm	80	12.1/26.7	620404000
27mm 250x50 cm	80	15.1/33.3	620405000
27mm 300x50 cm	80	18.2/40.1	620406000

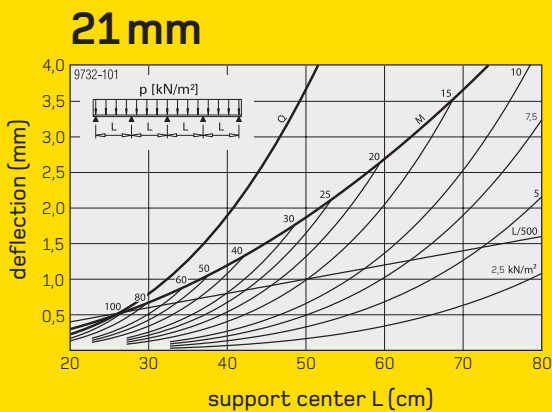

Bending stiffness $EI = 7.82 \text{ kNm}^2$ (15 % wood moisture)
M ... permissible bending moment
Q ... permissible shear force

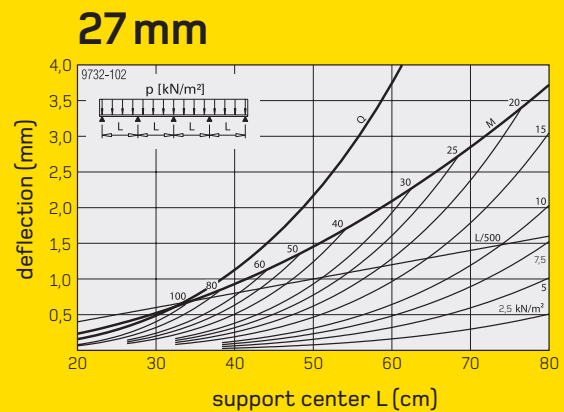

Bending stiffness $EI = 15.4 \text{ kNm}^2$ (15 % wood moisture)
M ... permissible bending moment
Q ... permissible shear force

Dimension	21 mm	27 mm
Thickness	$20.9 \pm 1.0 \text{ mm}$	$26.4 \pm 1.0 \text{ mm}$
Length	$\pm 1.0 \text{ mm}$	
Width	$\pm 1.0 \text{ mm}$	

Dimensional tolerance (new product at 12 % wood moisture)



By sourcing PEFC products, we are supporting sustainably managed forests globally.

www.pefc.org

We supply formwork.
Easy. Fast. Transparent.

Form-on USA Corp.
929 Alton Rd, Ste. 500
Miami Beach, FL 33139
United States of America

T: +1 786 562-9950
usa@form-on.com
form-on.com

