

Form-on Plywood sheets

EUCAplex plus VT

For high quality concrete surfaces

UNIplex HW

For regular concrete surfaces

UNIplex basic

For secondary concrete surfaces




Scan the QR code
to learn more.

form-on

For high quality concrete surfaces

- high usability and durability
- recommend for wall- and floor formwork
- replacement sheets for framed formwork

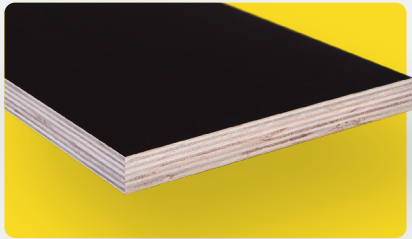

EUCApex plus VT

Solid, Asian, eucalyptus plywood sheet, double-sided coated with 120 g/m² film resin, for horizontal and vertical formwork applications for concrete surfaces with higher requirements.

THICKNESSES

18 mm & 15 mm

FORMAT

250 cm x 125 cm

TOLERANCE


± 0.5 mm

LAYERS

11 and 9

For regular concrete surfaces

- infill zones
- average frequency of use
- light sheets for easy handling
- optimal for floor formwork

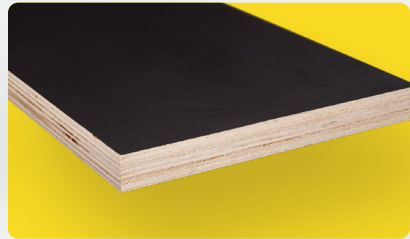

UNIplex HW

Asian, poplar plywood double-sided coated with 120 g/m² black melamine resin for loose floor formwork sheets for concrete surfaces without demand.

THICKNESSES

18 mm & 15 mm

FORMAT

250 cm x 125 cm

TOLERANCE


- 1.0 mm/+0.3 mm

LAYERS

11 and 9

For secondary concrete surfaces

- stay-in-place formwork & infill sheets
- single use
- site equipment, site- and screen fencing & dust partitions

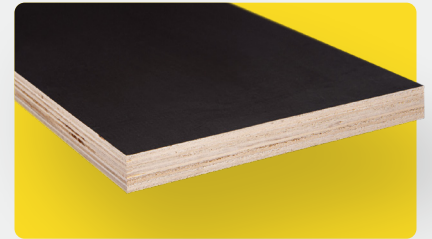

UNIplex basic

Asian, poplar plywood double-sided coated with 160 g/m² black melamine resin for secondary applications and infill.

THICKNESSES

18 mm & 15 mm

FORMAT

250 cm x 125 cm

TOLERANCE

± 1.5 mm

LAYERS

11 and 9

Other formats and thicknesses on request.

Wooden formwork sheets are a natural product. Moisture absorption and release, caused for example by changes in weather and contact with wet concrete, can result in swelling and shrinkage. Please appreciate that we cannot accept liability for climate- or weather related changes in shape or surface condition. All information on properties and appearance of the concrete surfaces and regarding possible number of use cycles of the formwork sheets are non-binding guide values. They are quoted here for information purposes only, within of formwork-related possibilities, the material-specific values for swelling and shrinkage, the wood-type and sheet specific properties and the conditions of use and treatment by the user.



All products also
available FSC-certified
on request.

We supply formwork.
Easy. Fast. Transparent.

Form-on USA Corp.
3055 Burris Rd
Davie, FL 33314
United States of America

T: +1 973 337-7416
usa@form-on.com
form-on.com

